



Technical datasheet

Jacmounts GLR 75 /716

For tool, plastic and textile machines, graphic and general production machines. Superior isolation and damping properties. Excellent non-skid properties.

Max. load
1800 lbs

Article information

For tool, plastic and textile machines, graphic and general production machines. Superior isolation and damping properties. Excellent non-skid properties.

Type	GLR 75 /716
Name	Jacmounts
Art. no.	1.11075.56
Color	RAL 7001 silver grey
Other colors upon request.	
Surface treatment	painted

Technical Data

Max. load [lbs]	1800
Weight [kg]	0.32
Temperature range from [°C]	-15
Temperature range to [°C]	100


Dimensions

Height H [mm]	24
Height H _{min} [mm] M12	36.5
Height H _{min} [mm] M16	40
Height H _{min} [mm] M20	43
Diameter D [mm]	84

Pad equipment

Bottom pad type	716
Pad thickness unloaded [mm]	15
Coefficient of friction on concrete with fine mortar	0.85
Hardness [° Shore A]	70 - 75
Bottom pad area A ₁ [cm ²]	44

Suitable studs, special studs, leveling screws, leveling sockets

	Studs S	M12, M16, M20	more
-------------------------------------------------------------------------------------	---------	---------------	----------------------


Remark extent of supply

Studs need to be ordered separately.

Type illustration



Dimensioned sketch

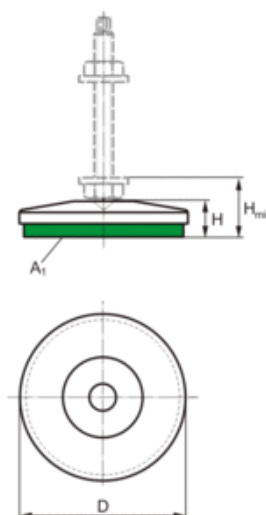

Mounting sketch

