

# > SENSITIVE AS sharpener

AS



## > standard equipment

- Complete guide sleeve  
With tool holder from 0 to 20 mm.
- Complete universal adjustable device, without grinding wheel.
- Watering device.
- 24 volt lighting.

## > Technical data

**High precision sharpener with mounted balanced spindle**  
On top quality special bearings.

**Spindle mounted on 2 sets of 2 special bearings**  
Prestressed and paired to 2 thousandths of a false circle.

**Hard chrome steel guide bar, superfine,**  
Ensuring the tool holder glides smoothly and without play.



**Any premature wear is prevented by sealing gaskets,**  
mounted in the bore of the tool holder, which reject all  
Abrasive materials projected by the watering liquid.

**The depth of passage on the grinding wheel is determined by a screw**  
micrometric, allowing a hundredth by hundredth advance by  
means of a vernier located to the left of the table.

**Speed: 3,000 rpm**  
Peripheral speed with 175mm diameter grinding wheel: 29m/s

## > AS

-Weight: 140 kg

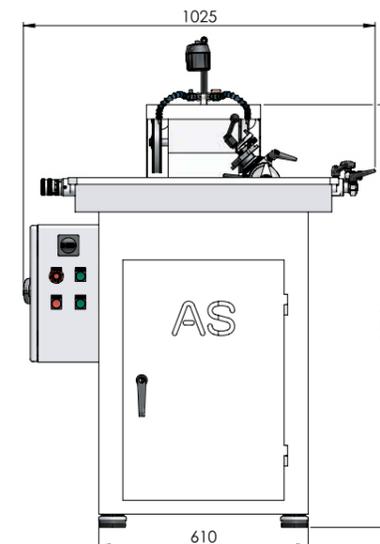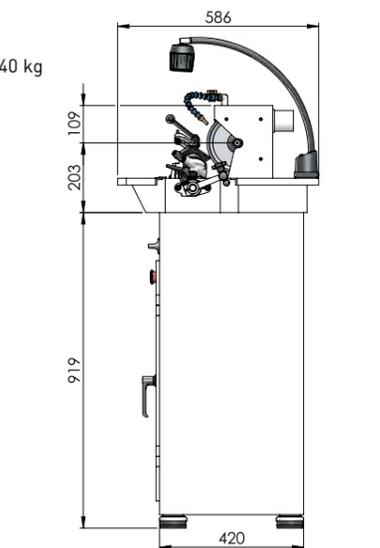

## > Options Accessories


Tool turret 0 to 20 mm

CLIP-LESS DIVIDER DEVICE

Complete guide sleeve  
With tool holder from 0 to 20 mm

### Depth stop

- Blocking de la barre
- Lever blocking
- Stop adjustment
- Stop blocking fin de course

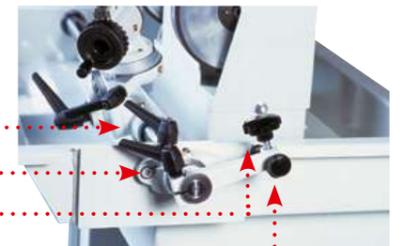

### SHARPENING PLATE External rays

TOOL HOLDER LOCK

- Blocking du support
- Blocking tilt



### Dividing device for sharpening milling cutters

Keys position

Divider disk

