

> PERCEUSE P 23V PERCEUSE TARAUDEUSE P 23T

scemama sa

Machines-outils / neuf et occasion
Machine-tools / new and second-hand
Werkzeugmaschinen / neu und gebraucht

Rte de Soleure 145 - 2504 Biel/Bienne SWITZERLAND
Tel. +41(0)32 344 20 60
info@scemama.ch - www.scemama.ch



> Standard equipment

- Depth stop on the column.
- Table version: head height adjustable
With lifting crank
On the head.
- Version colonne: avec monte
Take the table off the shelf.
- Touch screen speed adjustment brooch.



- Adjustment of the spindle speed
Depending on the Material.
- Automatic unscrewing with reversal on the ground Hole
detection by position sensor and pedal release function.
Adjustable
- The lifting speed is faster with the Tap Version (P23T).
- Increased safety through braking resistance and
immediate stop of the Servo tool guard.


> Technical features

Drilling capacity- steel 60 kg (mm)	23
Tapping capacity (version P23T)	M 14
Spindle taper	CM 2
Spindle sleeve diameter (mm) Spindle	52
stroke (mm) Standard power supply (120
Volt)	Tri/400
Any other voltage please consult us	
Distance spindle column (mm)	
Version created	210
Column diameter (mm)	200
Version created column output	
	80
	100

Speed: Electronic transmission from 80 to 6500 rpm


> P 23V-P 23T Established Version

- Weight: 110 kg
- Tisch: 300 x 265 mm
- 2 rainures en T 14 mm
- Transmission: 140 mm
- 1 Rainure en T
Supplementary
Vertical
For the other 2
dans l'axe
Broschen 's

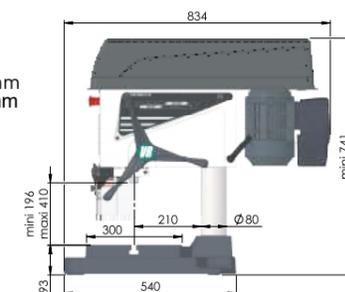

> P 23V-P 23T column type

- Weight version TR:
205 kg
- Weight version
TCE: 230 kg
- Table TR:
360 x 340 mm
- Table TCE:
370 x 370 mm
- 2 grooves
en T 14 mm
- Transmission: 140 mm

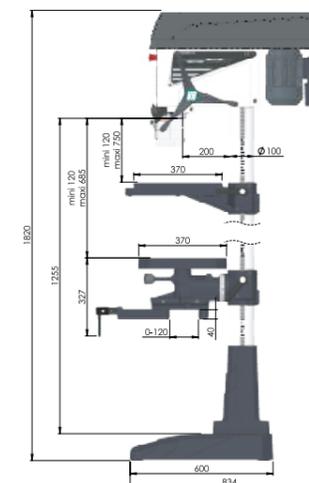

Cincinnati
Perceuses VR

P 23V

P 23T

> Accessory options

Column output
With Standard rectangular table TR-
Column version with reversible square table
, opposite TCE LED tube lighting with
teaser

Irrigation:

Established versions:
Column version:

Base with bowl, door and shelf

Raised column in 200 mm table
version

Basis for mechanics

(for column drilling rigs)

615x400 2 T-slots 14mm Wheelbase
: 140mm

Montagewelle CM2/B16

3 to 16 mm Tappbox with self-
tapping chuck

Door pin with WINNER CM2

5 DIN standard M4 to M12 sockets

Contactor opening and jaw width
100mm EP100 BF Contactor

opening and jaw width 120mm
EP120 BF Fluorine drilling

Digital display pins drop



Irrigation



Socket



Bull



Etau EP 100 BF



Briefcase with thread



Digital Display
Brosche fallen

www.cincinnati.fr



Designed and produced in French.
Complies with the European CE standard.