

> Bench drill PE 32VM/PE 32VR/PE 32VE Column drill PC 32VR/PC 32VM/PC 32VE

> standard equipment

- Tapered bearings with backlash compensation.
- Cabestan 4 branches.
- Depth stop on column.
- Mechanical speed variator (VM version) or mechanical variator with speed reducer (VR version) or electronic variator with touch screen



PE 32VM PE 32VR PE 32VE PC 32VM PC 32VR PC 32VE

Version VE:




> Technical data

Drilling Capacity-Steel 60 kg (mm)	32
Tapping capacity VM	M22
Tapping capacity VR	M24
Spindle cone	CM 3
Spindle sleeve diameter (mm)	80
Course de broche (mm)	150
Alimentation standard (Volt)	Tri/400
Consult us for another tension	
Distance broche colonne (mm)	300
Column diameter (mm)	115
Speed VM version: variable speed from 120 to 5000 rpm in 2 ranges: 120 to 880 rpm & 1000 to 5000 rpm	
Speed VR version: variable speed from 70 to 2300 rpm in 2 ranges: 70 to 450 rpm & 400 to 2300 rpm	
Speeds VE version: electronic variator. variable speed From 50 to 2500 rpm in 2 ranges: 50 to 430 rpm & 290 to 2500 rpm	

> PE 32


- Weight: 275 kg
- Table : 430 x 427 mm
- 2 rainures en T 14 mm
- Caliber: 170 mm

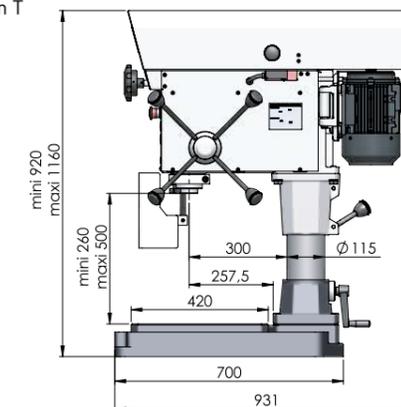

> PC 32

- Weight: 310 kg
- Table TR 430 x 427 mm, 2 T-slots center distance 140 mm
- Table TCE : 410x340 mm, 3 T-grooves centre -to-centre 100 mm

- Distance broche-table TR : 100-755 mm
- Distance broche-table TCE : 40-695 mm

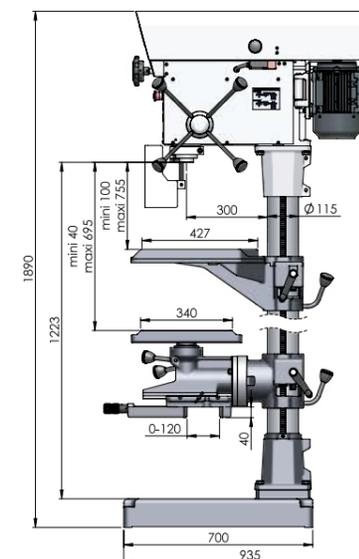

> Options Accessories

For column version: reversible square table with opposite vice TCE automatic

tapping with reversal

At the bottom of the hole by position detector and jam clearance function.

Version VM / VR :

Version VE:

Eclairage tube LED

Watering:

Established Version:

Column Version:

Base with bowl:

Standard :

With door and shelf:

Micrometric descent device Automatic

descent Electromagnetic clutch 1 Feed: 0.

1 mm/tr Micrometric and automatic

descent Electromagnetic clutch

3 feeds: 0, 08-0, 12-0, 20 mm/tr Raised

column in bench version 100mm

Mechanical base (for drill column)

Mounting shaft CM3/B16

With self-clamping chuck 3 to 16mm

With CM3 tap holder chuck

7 sockets M5 to M20 DIN standard

Drilling vice opening and jaw width

120mm EP120 BF Fluoperçage

Reinforced security for national education (24V lighting included)

VR Reducer Drive



Mechanical variator



scemama sa

Machines-outils / neuf et occasion - Machines-tools / second-hand
 Werkzeugmaschinen / neu und gebraucht

Route de Soleure 145
 CH-2504 Bienne / Switzerland
 Tél +41 (0)32 344 20 60

www.scemama.ch info@scemama.ch