

> High speed SENSITIVE drill PE 5

PE 5



> standard equipment

- High strength treated steel spindle, Mounted on precision bearings.
- Smooth and quiet operation: an additional bearing mounted under the spindle pulley absorbs the belt tension, Eliminates noise and reduces transmission wear. - Two models: clamp or mandrel. Sheath ground and ground in its bore.
- sensitive descent by single-branch capstan adjustable in any position to reduce operator fatigue.
- Adjustable sheath balancing spring to avoid tool damage.
- Transmission by interchangeable pulleys, made of light alloy, balanced at the factory.
- Adjustment of drilling depth on circular vernier with micrometric stop.


> Technical data

Drilling Capacity-Steel 60 kg (mm)	5
Spindle cone	DIN B10 ou pince
Spindle sleeve diameter (mm)	40
Course de broche (mm)	40
Alimentation standard (Volt)	Tri/400
Consult us for another tension	
Distance broche colonne (mm)	120
Column diameter (mm)	60

Speed
Cone Version Din B10: 9 speeds from 440 to 12,000 rpm
Clamp Version: 10 speeds from 440 to 18,000 rpm

> PE 5

-Weight: 40 kg-Rectangular ground Table 240 x 230 mm

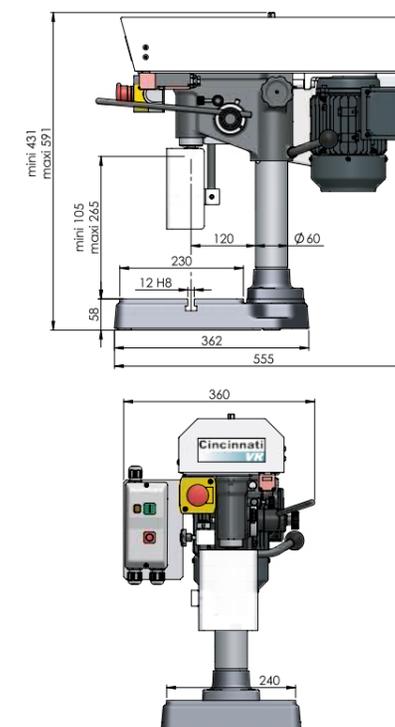

> Options Accessories

Electronic Variation

400V Tri

230V Mono ou Tri

24 volt lighting

watering

Base with bowl, door and shelf

Drilling vice Opening and jaw width

100mm EP100 BF

Reinforced security for national

education

(24V lighting included)

Table grand passage 310mm



Etau EP 100 BF