

> PERCEUSE P 23S

scemama sa

Machines-outils / neuf et occasion
Machine-tools / new and second-hand
Werkzeugmaschinen / neu und gebraucht

Rte de Soleure 145 - 2504 Biel/Bienne SWITZERLAND
Tel. +41(0)32 344 20 60
info@scemama.ch - www.scemama.ch



> standard equipment


- Depth stop on column.
- Workbench Version: height adjustable head with crank for raising and lowering on the head.
- Column Version: with table raising and lowering by rack.
- Servo tool protector.

> Technical data

Drilling capacity-steel 60 kg (mm)	23
Spindle taper	CM 2
Spindle Sheath Diameter (mm)	52
Spindle Travel (mm) standard Power	120
Supply (Volt)	Tri/400
Consult us for another tension	
Distance broche colonne (mm)	
Established version	210
Column version Column	200
Diameter (mm)	
Established version	80
Column version	100
Speeds: 10 speeds from 150 to 6500 rpm	


> P 23S Established version

- Weight: 110 kg
- Table : 300 x 265 mm
- 2 rainures en T 14 mm
- Carry: 140 mm
- 1 additional T-groove perpendicular to the other 2 in the axis Brooch

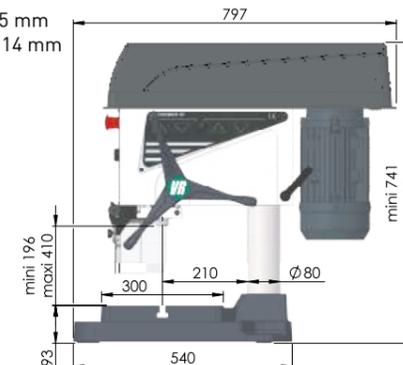

> P 23S version colonne

- Poids version TR : 205 kg
- Poids version TCE : 230 kg
- Table TR : 360 x 340 mm
- Table TCE : 370 x 370 mm
- 2 grooves en T 14 mm
- Carry: 140 mm

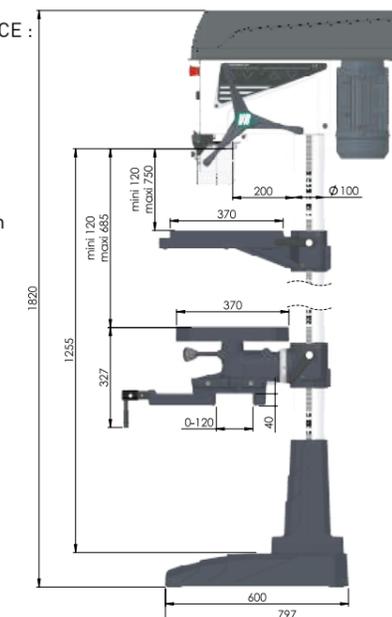

> Options Accessories

Column Version
with standard rectangular table TR

Column Version with reversible
square table with opposite clamp

TCE LED tube lighting

Watering:
Established Version:
Column Version:

Base with bowl, door and shelf raised
column in workbench version
200mm

Mechanic base
(for column drill)
615x400 2 T-grooves 14mm Center
distance: 140mm

Mounting shaft CM2/B16
With self-clamping chuck 3 to 16mm

Drilling vice Opening and jaw width
100mm EP100 BF

Multi-spindle heads

Reinforced security for National
Education (LED tube lighting included)



pede
stal



watering



EP 100 BF multi-pin head mechanic base

www.cincinnati.fr